

Focus5

Linear Motor Drive

High Speed 5-Axis Machine Center



KEN

Focus On High Speed & 5-Axis

- Stability
- Precision
- Strength



KEN ICHI MACHINE CO., LTD.

www.kencnc.com

Focus5

Linear Motor Drive

High Speed 5-Axis Machine Center

HIGH-SPEED PERFORMANCE

1. High rigidity one-piece column and crossbeam structure
2. X / Y-axis Linear motor drive
3. Feed rate: 60 m/min
4. European Direct-drive Torque motor 2-axis milling head

Application For

Automotive Plastic Injection Mold Core, Lamp Mold
Aircraft Aluminum Structure, Wing Rib, Floor Beam
Mechanical Component and Electronic Component Mold



Linear Motor Drive

The inevitable trend in the future


- Backlash free offers high positioning accuracy.
- Direct transmission
Without ball screw/nut, bearings and couplings.
- Free of wear due to friction free drive concept.
- Simple structure / long-term accuracy / easy maintenance.

High speed feedrate 60 m/min




Optimize Structural Design High-Rigidity Structure

- One-piece base and column with high rigidity to ensure the best structural rigidity and stability of high-speed cutting.
- X/Y/Z-axis use high-speed and heavy-duty roller linear guideway. Machine can achieve excellent high-speed cutting dynamic and long-lasting accuracy.
- Standard with high resolution optical scales on X/Y/Z-axis.

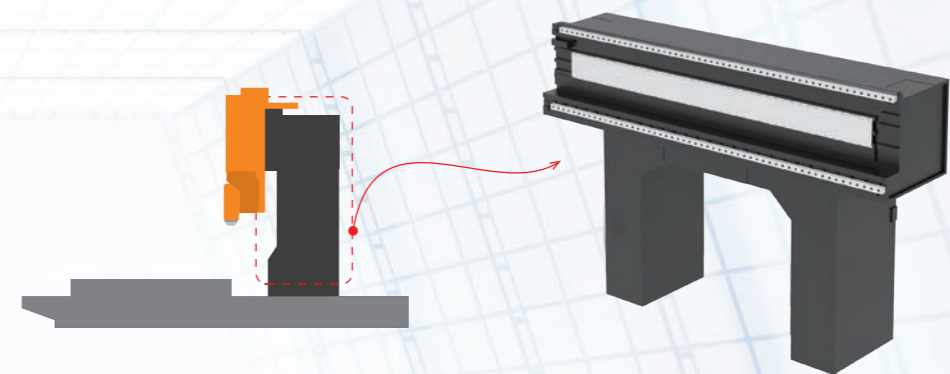

One- Piece Column & Crossbeam

Linear Motor VS Ball Screw

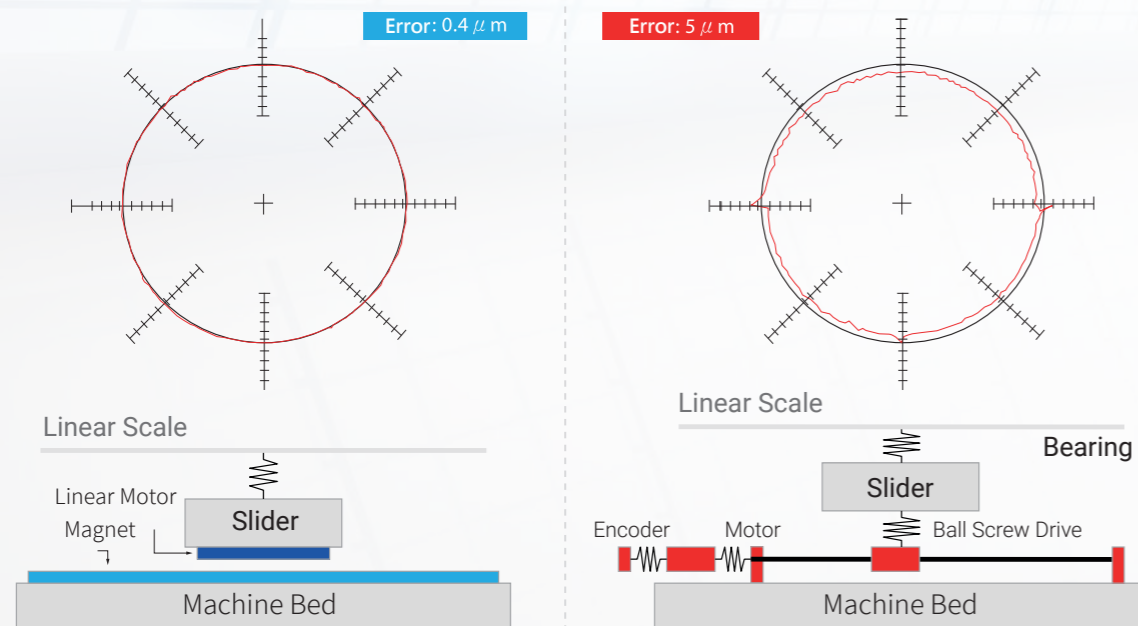


- Direct transmission
- System with high KV value
- Path of high precision
- No backlash

- Transmission chain length, the error is larger
- The path is less accurate
- Backlash exists

Source : Siemens laboratory testing

Structural Analysis Software with Numerical Technique FEM

Advanced FEM analysis and design to optimize higher rigidity, response and provide stability of high-speed cutting.

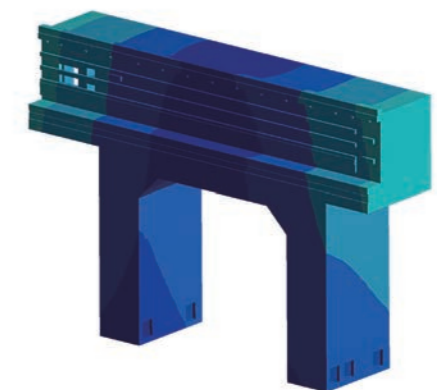


Excellent Design For 5-Axis High Speed Machine

Y-Axis

Excellent Rigidity One-Piece Column and Crossbeam

1. Y-axis for the saddle to move on the crossbeam. Crossbeam uses roller bearing and linear guideways to ensure high rigidity and support for the saddle to increase rigidity.
2. Y-axis uses linear motor movement without coupling for direct drive driven saddle, which can produce high-speed response and high-precision machining.

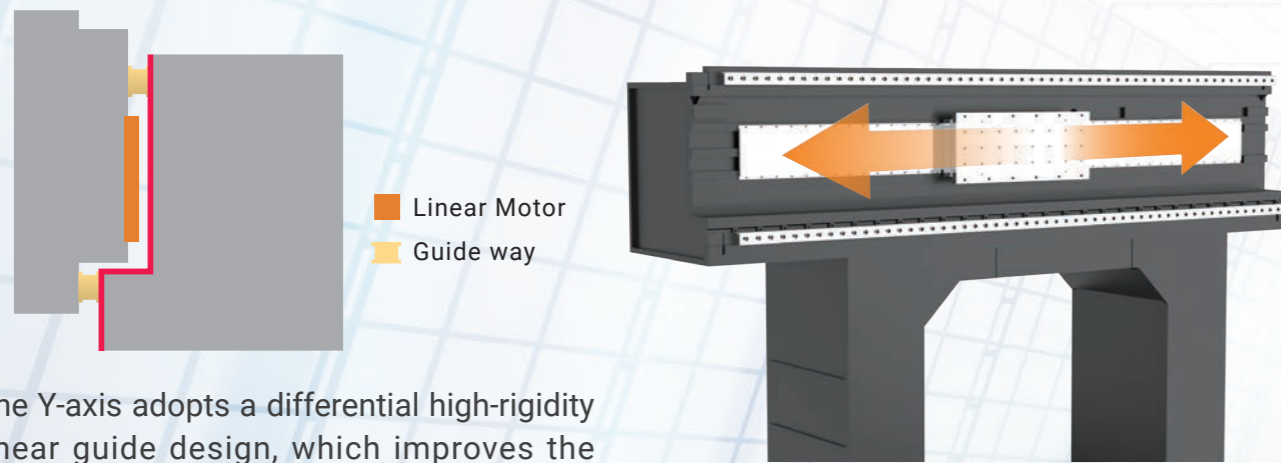


- The Y-axis adopts a differential high-rigidity linear guide design, which improves the overall rigidity of the machining.

Z-Axis

Optimize the Rigidity and Accuracy of the Machine


1. Z-axis moves up and down the crossbeam. It is equipped with two roller-bearings and linear guideways, each with three sliders to support the crossbeam.
2. Z-axis is equipped with dual ball screw to achieve high speed response, process requirements and achieve high precision. It has spindle in the center of the 2-axis milling head to prevent uneven stress, thermal deformation and shift phenomenon.

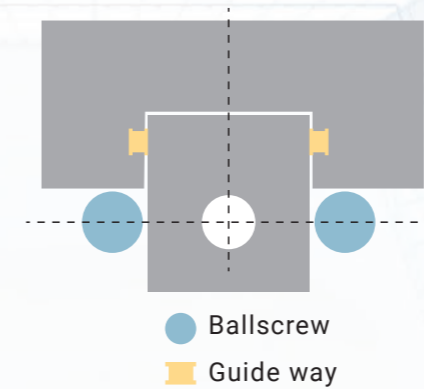

- The feed drive is in the same plane as the spindle, which improves the efficiency of the feed transmission.

X-Axis

1. X-axis with 2 high-speed and heavy-duty roller type linear guide ways has large span design to provide high rigidity.
2. The base is one-piece design can reach high rigidity with Direct Drive linear motor. It can improve the efficiency and stability during milling process and excellent control over gravity.
3. Table on X-axis is driven by linear motor without belt and coupling to increase the responsiveness of the high-speed movement.

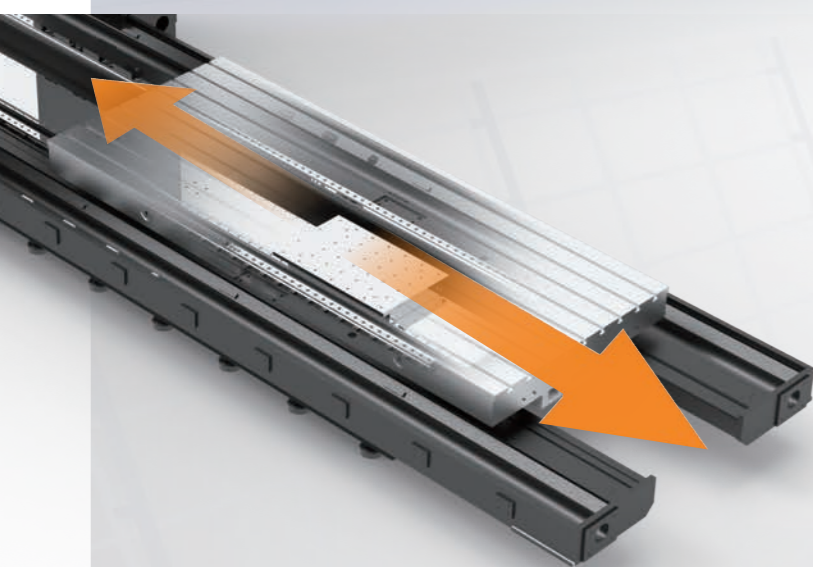

Wide and Spacious Door

Interference free with a large door. Easy for loading and unloading.



European Torque Motor Milling Head

Torque Motor Direct Drive

- High feed rate, high acceleration & deceleration
- Backlash free offers high-positioning accuracy
- Simple structure, easy maintenance
- No ball screw, no worn gears, no belts and other wearable mechanism transmission



Side Type

Specify for Plastic Injection Mold

Compact Design, Low Interference



- Torque motor direct drive on A/C-axis with high torque and high precision performance.
- High braking torque on A/C-axis can satisfy any position of the milling requirements.

Unit: mm


	(A63) 24,000	(A100) 15,000	(A63) 24,000	(A100) 15,000
A	233	268	D	526
B	43	78	E	210
C	135		F	400

Milling Head (Torque Motor)

Specification		A / C-axis
Max. rotation speed	rpm	50 / 50
Max. rotation accerelation	rad/s ²	30 / 30
Max. rotation torque	Nm	500 / 500
Brake torque	Nm	4,000 / 4,000
Position accuracy	arc.sec	5 / 5
Rotate angle	degree	±115°/±360°

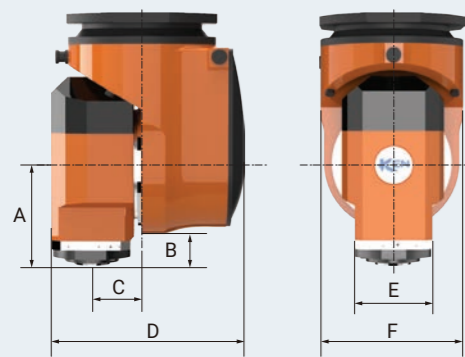


Torque Motor



Cross Roller Bearing



Encoder

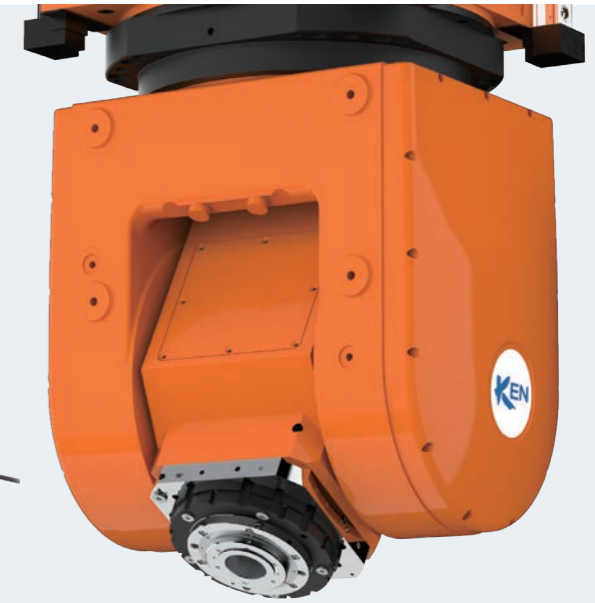

Fork Type

Modular Design

High Rigidity, Dual Side Bearing Support


- Fast and convenient maintenance, low maintenance cost.
- High rigidity cross roller bearings on B/C-axis ensure high accuracy and rigidity of milling head.
- High braking torque on B/C-axis can satisfy any position of the milling requirements.

Unit: mm

	(A63) 24,000	(A100) 15,000	(A63) 24,000	(A100) 15,000
A	273	308	D	564
B	88	123	E	205
C	230		F	380


Milling Head (Torque Motor)

Specification		B / C-axis
Max. rotation speed	rpm	50 / 50
Max. rotation accerelation	rad/s ²	30 / 30
Max. rotation torque	Nm	500 / 698
Brake torque	Nm	4,000 / 4,000
Position accuracy	arc.sec	5 / 5
Rotate angle	degree	±110°/±360°

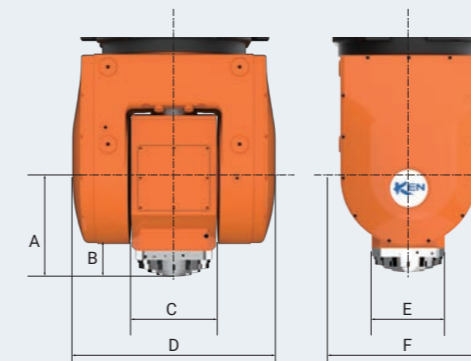


European Spindle 24,000 rpm (HSK-A63)

Spindle power S1-100% (S6-40%)	kW	42 (55)
Spindle torque S1-100% (S6-40%)	Nm	67 (87)

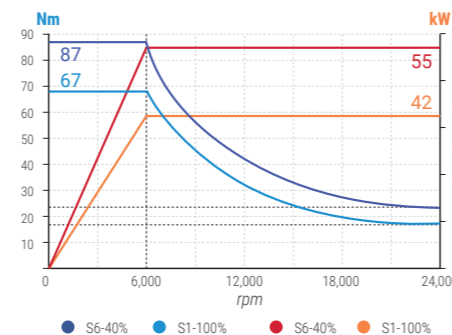

European Spindle 15,000 rpm (HSK-A100)


Spindle power S1-100% (S6-40%)	kW	50 (65)
Spindle torque S1-100% (S6-40%)	Nm	96 (124)

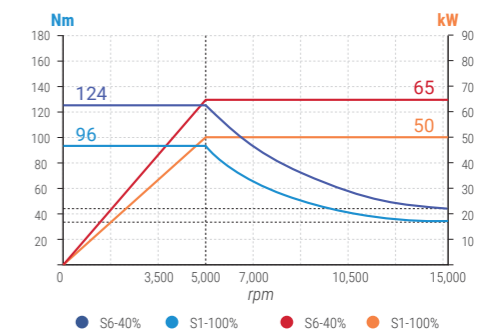

Applications

Aerospace Precision Parts

Floor, wing ribs, hatch door and etc.

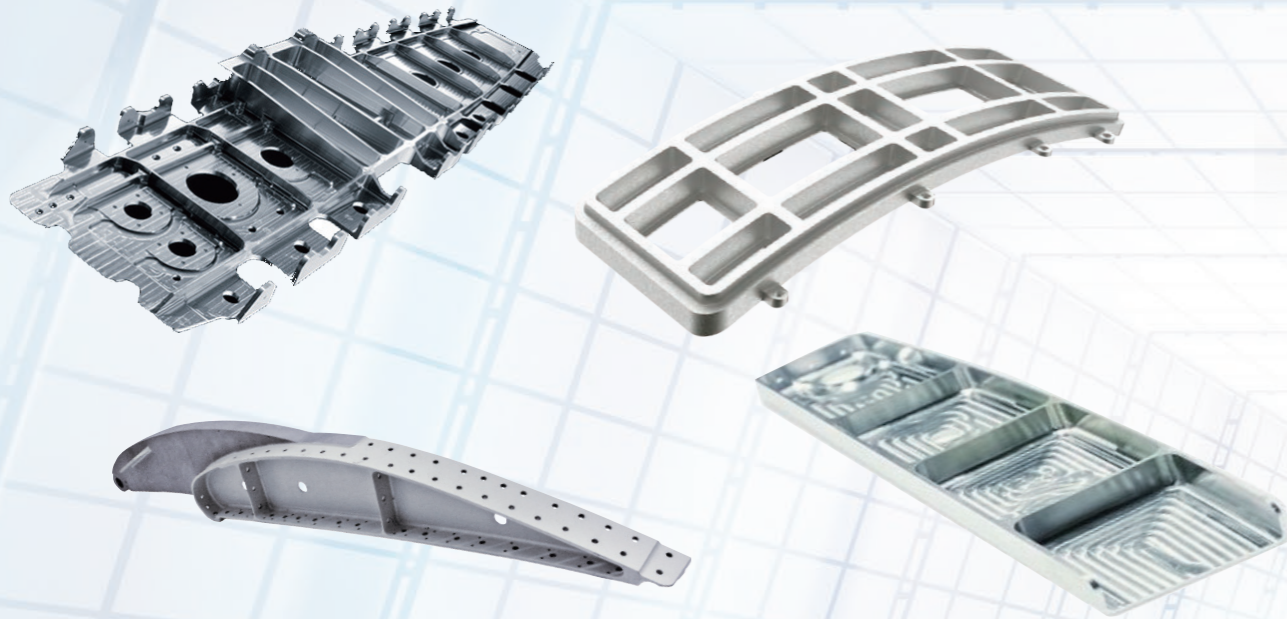


Machine Specifications



Automotive Plastic Injection Mold

Lamp mold, front grill, panel and etc.

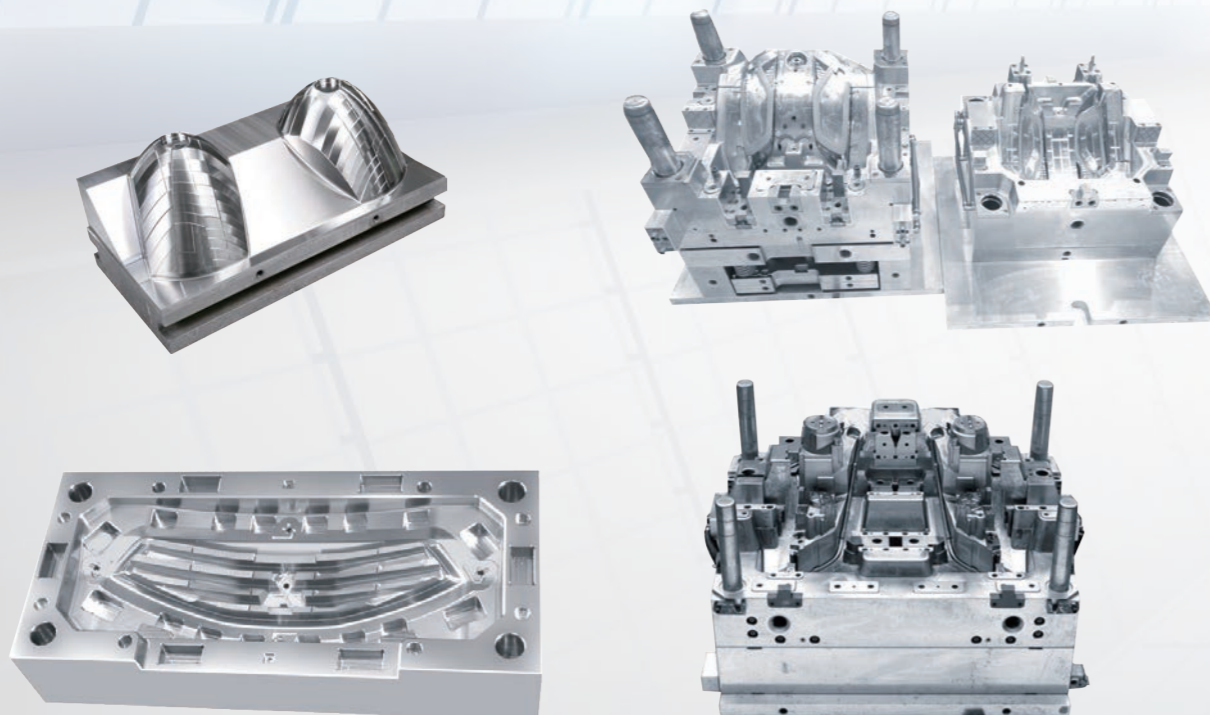


Machine Model		Focus5 2020	Focus5 2030	Focus5 2040	Focus5 2330	Focus5 2340
Travel						
X-axis travel	mm	2,060	3,060	4,060	3,060	4,060
Y-axis travel	mm	2,000			2,300	
Z-axis travel	mm	800 (opt. 1,000)				
Spindle nose to table distance*1	mm	30 ~ 830 (opt. 30 ~ 1,030)				
Distance between columns	mm	1,500			1,800	
Table						
Table (X-axis direction)	mm	2,000	3,000	4,000	3,000	4,000
Table (Y-axis direction)	mm	1,200			1,500	
T-slot width	mm	18				
T-slot space	mm	125				
Table load	kg	3,000	4,000	4,500	4,500	5,000
Feedrate						
X/Y/Z-axis drives		Linear Motor / Linear Motor / Dual Ball Screw				
X/Y/Z-axis feedrate	m/min	60 / 60 / 48				



*1 : Standard Configuration is with Side Type 24,000rpm (HSK-A63), other milling head please review p.12

Automatic Tool Changer		HSK-A63	HSK-A100
Tool capacity	T	24 (opt. 32 / 40 / 60)	24 (opt. 32 / 40 / 60)
Max. tool weight	kg	7	15
Max. tool length	mm	350	350
Max. tool diameter	mm	Ø75	Ø125

Work Area

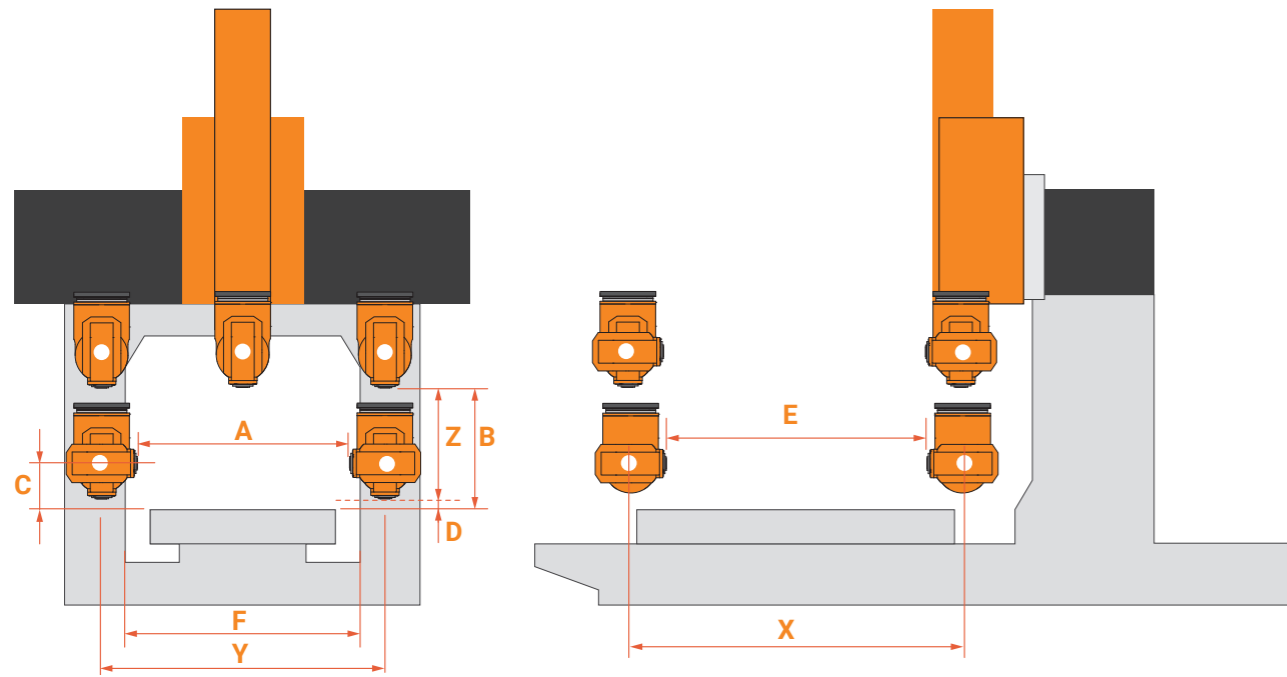

Machine Dimension

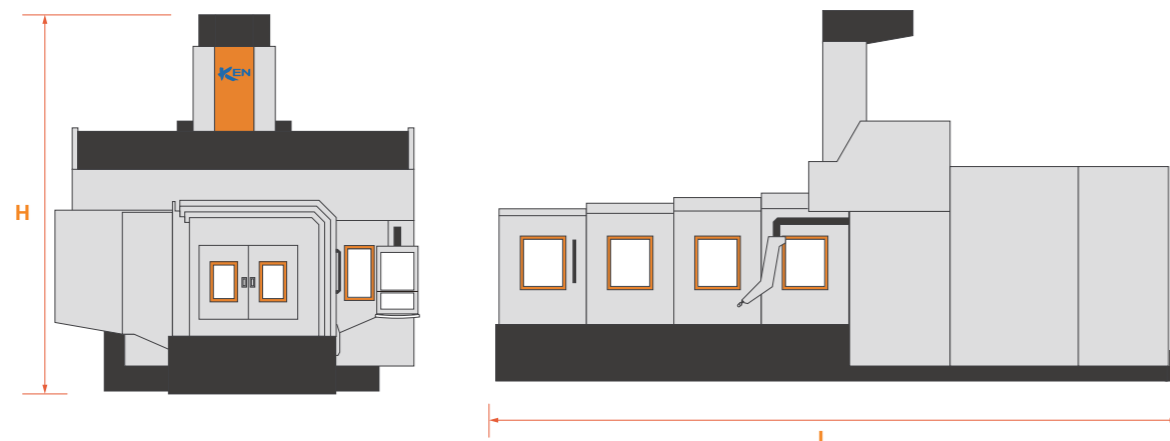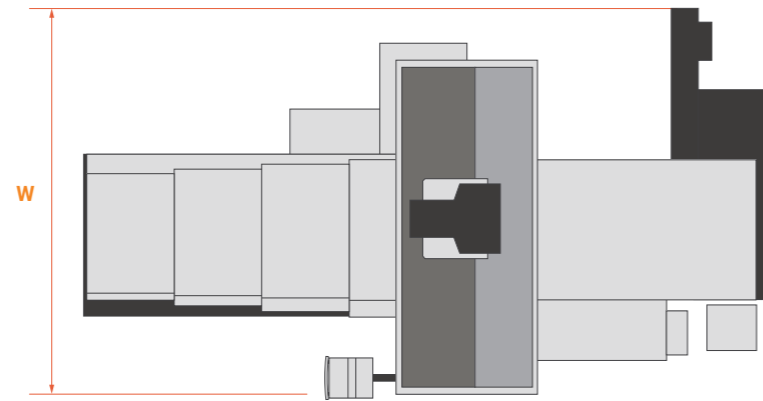

Work Area

Machine Model			Focus5 2020	Focus5 2030	Focus5 2040	Focus5 2330	Focus5 2340	
A	Y-axis distance (A/B-axis 90°)	Side Head 24,000 (A63)	mm	1,534		1,834		
		Side Head 15,000 (A100)	mm	1,464		1,764		
		Fork Head 24,000 (A63)	mm	1,454		1,754		
		Fork Head 15,000 (A100)	mm	1,384		1,684		
B	Z-axis opening height	Side Head 24,000 (A63)	mm	830 (opt. Z-axis 1,000: 1,030)				
		Side Head 15,000 (A100)	mm					
		Fork Head 24,000 (A63)	mm	850 (opt. Z-axis 1,000: 1,050)				
		Fork Head 15,000 (A100)	mm					
C	Z-axis distance (A/B-axis 90°)	Side Head 24,000 (A63)	mm			263		
		Side Head 15,000 (A100)	mm			298		
		Fork Head 24,000 (A63)	mm			323		
		Fork Head 15,000 (A100)	mm			358		
D	Spindle to table distance	Side Head 24,000 (A63)	mm	30				
		Side Head 15,000 (A100)	mm					
		Fork Head 24,000 (A63)	mm	50				
		Fork Head 15,000 (A100)	mm					
E	X-axis distance (A/B-axis 90°)	Side Head 24,000 (A63)	mm	1,594	2,594	3,594	2,594	3,594
		Side Head 15,000 (A100)	mm	1,524	2,524	3,524	2,524	3,524
		Fork Head 24,000 (A63)	mm	1,514	2,514	3,514	2,514	3,514
		Fork Head 15,000 (A100)	mm	1,444	2,444	3,444	2,444	3,444
F	Distance between columns	mm	1,500			1,800		
X	X-axis travel	mm	2,060	3,060	4,060	3,060	4,060	
Y	Y-axis travel	mm	2,000			2,300		
Z	Z-axis travel	mm	800 (opt. 1,000)					

Machine Dimension





Machine Model			Focus5 2020	Focus5 2030	Focus5 2040	Focus5 2330	Focus5 2340
L	Length	mm	7,570	8,590	9,570	8,590	9,570
W	Width	mm	4,610			4,910	
H	Height	mm	4,640 (opt. Z-axis 1,000: 4,850)				

Standard Configuration

- HEIDENHAIN TNC-640 controller (5-axis continuous)
- HEIDENHAIN handwheel-HR520
- European Torque Motor Side Type Milling Head
- European Spindle HSK-A63/87Nm/55kW/24,000rpm
- 24 tools magazine
- X/Y-axis linear motor drive
- Z-axis adopt double server motor with dual ball screws drive
- 6 roller linear guide ways(X/Y/Z each 2)
- A/C Axis high resolution angle encoder
- 3 HEIDENHAIN linear scale (X/Y/Z-axis each 1 set)
- Cooler for X/Y Linear motors, milling head torque motors and spindle
- Cutting oil mist device
- Spindle coolant nozzles
- Spindle oil mist lubrication system
- Twin chip augers and front chip conveyor with a disposal cart
- Sub-coolant tank with filter system
- Oil skimmer
- Front and rear working door safety interlock
- Waterproof work light
- Electrical cabinet with air-conditioning system, filtration and ventilation installations and variety of electrical protection
- Used in all meta international system of units (SI) standards
- Protection devices complete and reliable, work area safety, according to ISO 12100-1 & -2 1992
- Machine standard paint

Option Configuration

- European Torque Motor Side Type Milling Head HSK-A100/124Nm/65kW/15,000rpm
- European Torque Motor Fork Type Milling Head HSK-A63/87Nm/55kW/24,000rpm HSK-A100/124Nm/65kW/15,000rpm
- SIEMENS controller (5-axis continuous)
- Wireless electronic handwheel HR550
- Automatic kinematics 5-axis compensation function
- HEIDENHAIN handwheel GPS (Global Pgm Setting) function
- BLUM form control software
- BLUM laser tool measuring system
- BLUM probe for workpiece measuring system
- 32 / 40 / 60 tools magazine
- Coolant through spindle 20/30/50/70 bar
- Oil mist collector
- Transformer
- Voltage stabilizer

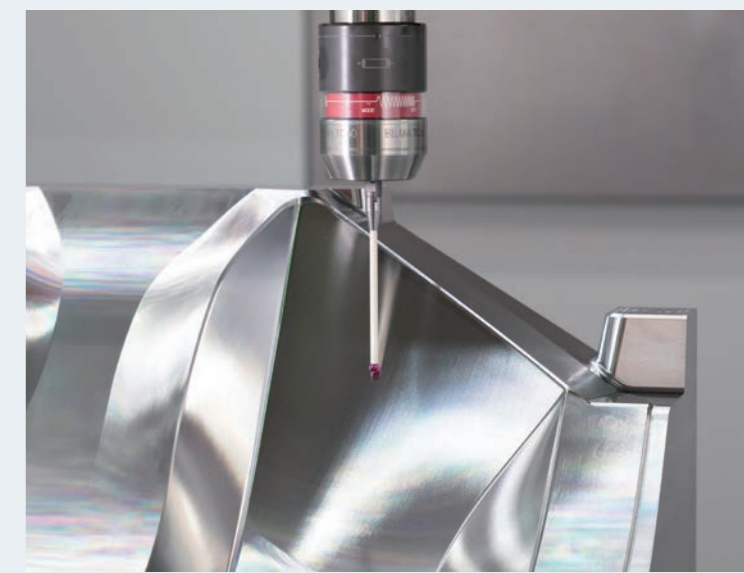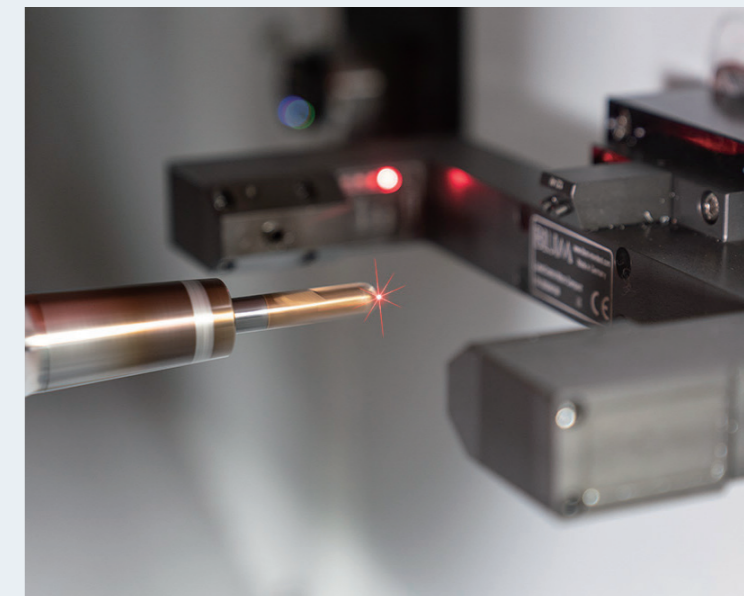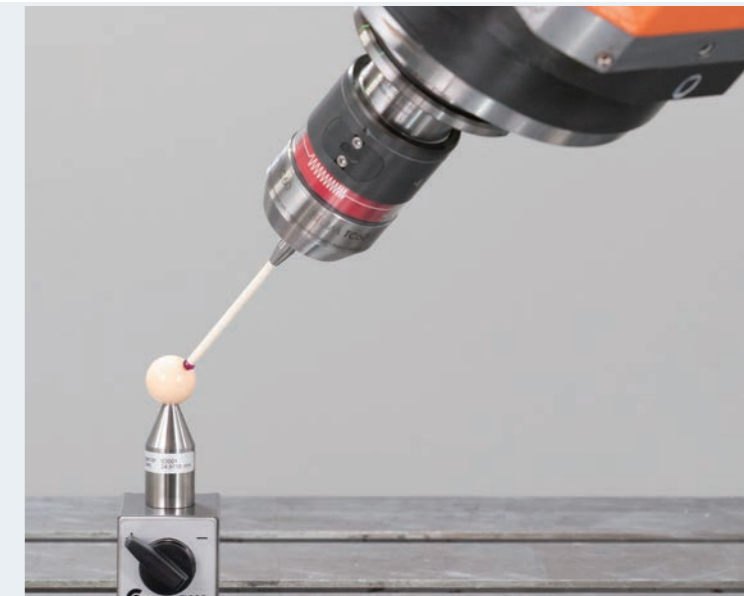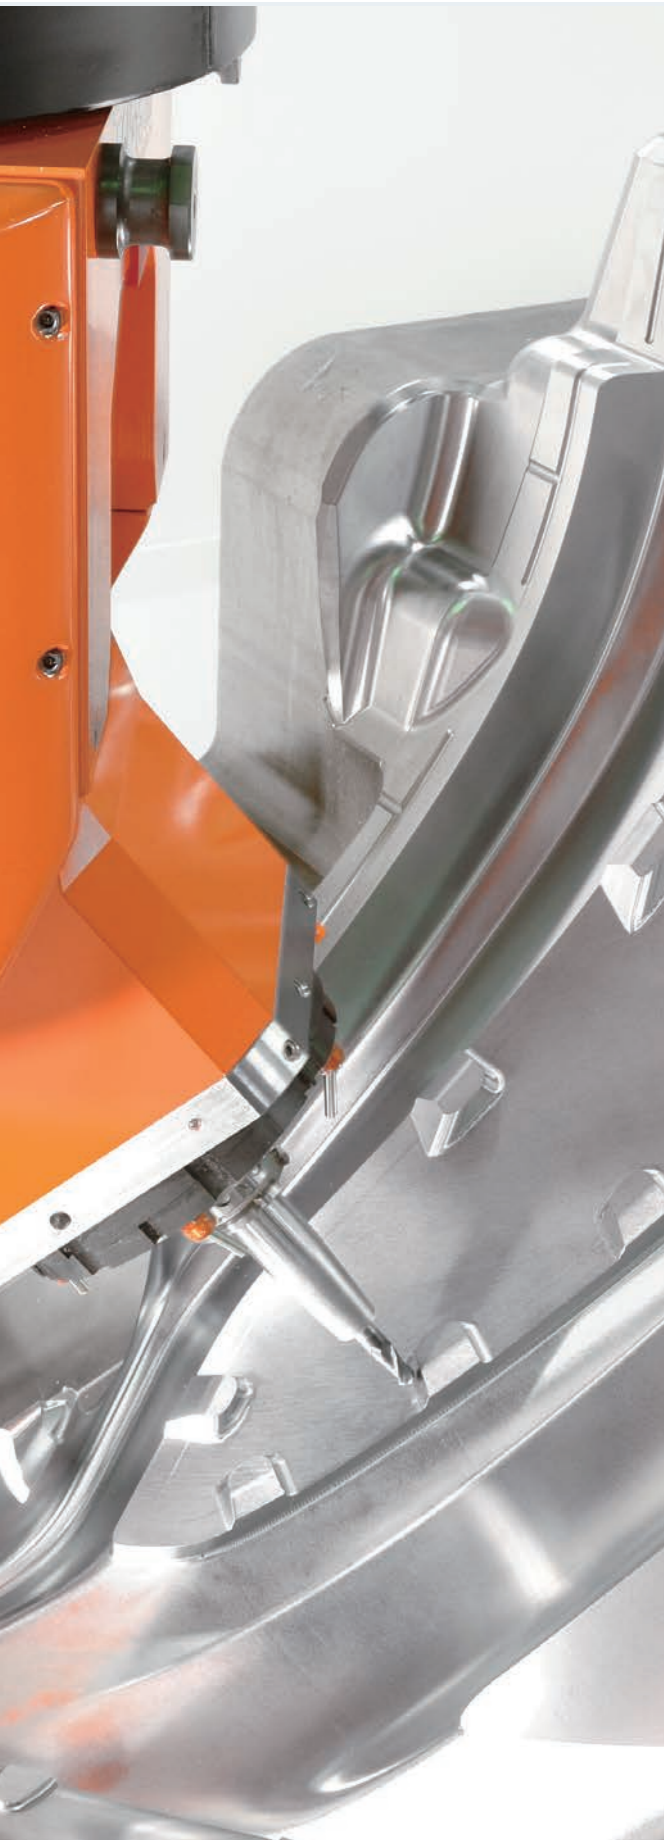


ALL SERIES MACHINES



JET
Moving Column Type
5-Axis Profile Machine Center



GIANT
Moving Column Mobile Crossbeam Type
5-Axis Machine Center



Loader
Moving Column Type
5-axis Machine Center



LinmaxBTwin
Double Gantry Type High Speed
5-Axis Machine Center



LinmaxB
Gantry Type High Speed
5-Axis Machine Center



CompactB
Gantry Type High Speed
5-Axis Machine Center



FocusS
High Speed
5-Axis Machine Center




SABER
Double Column High Torque
5-Axis Machining Center



RHINO
Horizontal High Torque
5-Axis Machine Center



ROTOR
High Speed
5-Axis Machine Center

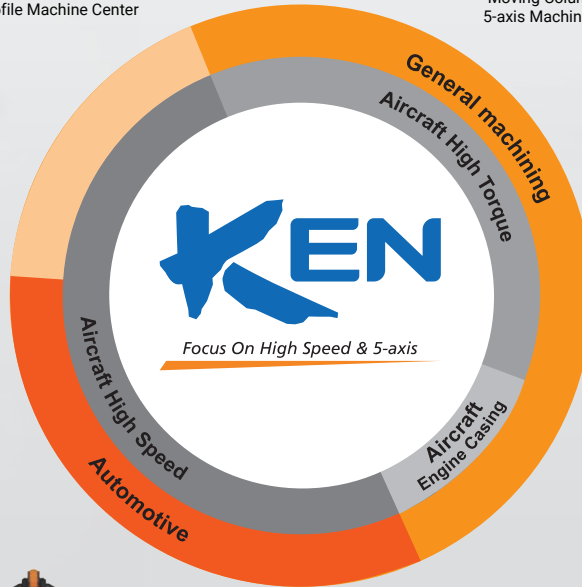

KEN ICHI MACHINE CO., LTD.
www.kencnc.com

No. 73, Zhongshan 12th Road., Daya Dist, Taichung City 428, Taiwan
Tel : 04-2565-3080 Fax : 04-2565-3090
E-mail : info@kencnc.com